
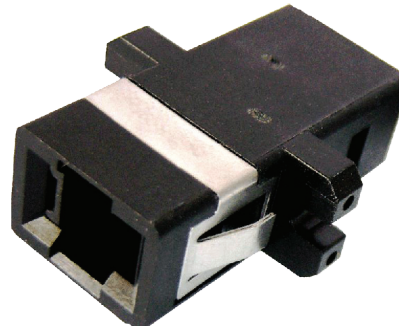


➤ MTRJ Fiber Optic Adaptor

MTRJ fiber optic adaptors are with polymer housing, there are two types available, one is flange type; another is SC footprint type, both Simplex. MTRJ fiber optic adaptors are black color.

Design & Materials

Adaptor material	High Impact flame retardant thermoplastic UL94-V0
Operating Temperature	-40 to +85° C
Storage Temperature:	-40 to +85° C
Mating durability	>500 Mating Cycles

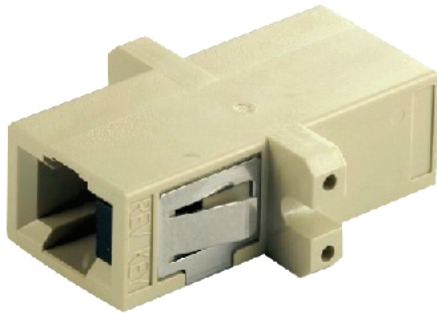

Shuttered Fiber Optic Adapter

Shuttered Fiber Optic Adapters come with high precision zirconia alignment sleeve with a spring-loaded plastic shutter. The shutter protects the adapter dust and debris, whilst maintaining laser safety for the user.

Standards Compliance

IEC 61754-4, IEC 60784-14 and TIA 604-3
RoHS, REACH SvHC compliant

Features

- Protects eyes from being injured by laser
- High precision alignment sleeve
- Protective and maintaining adapter cleanliness
- Low insertion loss

