


## ST Fiber Optic Adaptor

ST fiber optic adaptors are threaded type, with metal housing, ceramic sleeve, Simplex and duplex versions.

### Design & Materials

Adaptor material	Zinc Alloy with nickel plating
Split Sleeve Material	Zirconia ceramic
Capillary diameter tolerance (Single Mode)	126 ± 0.5µm
Capillary diameter tolerance (Multimode)	127± 0.5µm
Operating Temperature	-40 to +75° C
Storage Temperature:	-40 to +85° C
Mating durability	>500 Mating Cycles

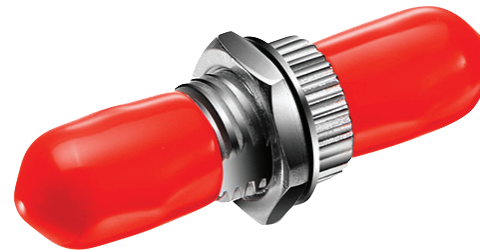

## ST Hybrid Fiber Optic Adaptor

ST hybrid fiber optic adaptors are also flange type with Zinc alloy Nickel plated housing. Hybrid adaptors are available in singlemode and multimode and many different configurations. They can be practically used in any application and connect different connector types.

