


➤ Unshielded 24Port

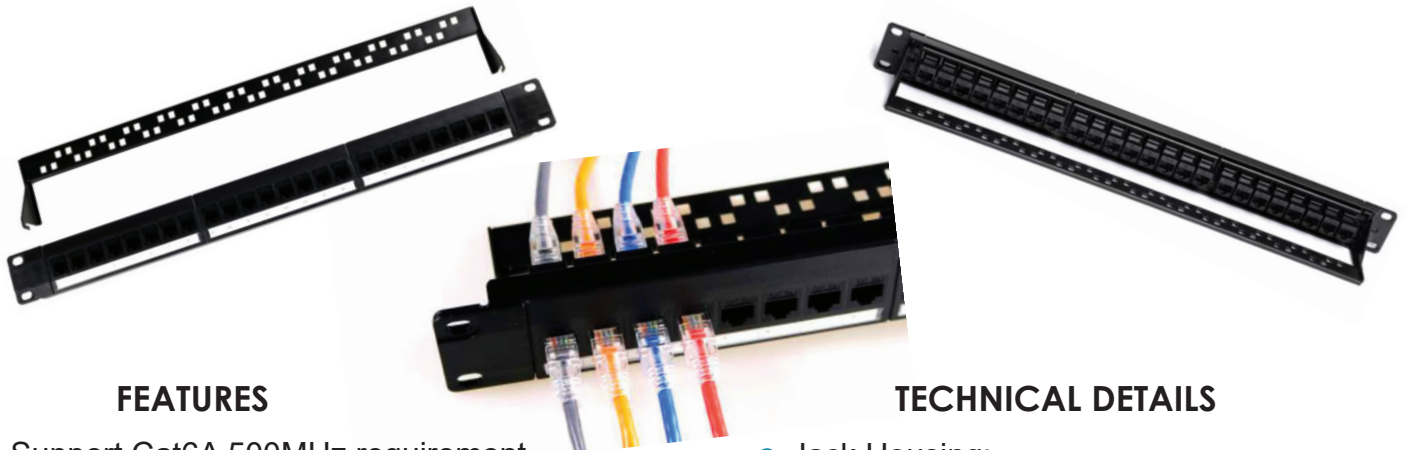

FEATURES

- Support Cat6A 500MHz requirement
- Backward compatibility for cat6 and Cat5E
- Hand screw, easy to open cover
- Unique design of balance circuit board and line pair decrease cross talk and increase allowance.
- Sturdy and easy-install design reduces installation and operating costs.
- Unique design of IDC terminating block allows
- 110 or krone tools.
- Compatible with 19-inch rack and cabinets.
- Labels for all ports ensure convenient operation.
- ID stripes for identifying port allocations

TECHNICAL DETAILS

- Jack Housing:
- Black ABS Plastic Housing (UL 94V-0)
- RJ45 Jack Contact Material & Finish: Phosphor Bronze With 50 Micro-Inch Nickel Plated Contact Area: Min. 3mm 50 Micro-Inch Gold Plated
- PCB: FR4, UL 94V-0
- Panel Frame: ABS Plastic in black
- Standard 19" Rack Width, 1U Height

COMPLIANCES

- ▶ ISO/IEC 11801
- ▶ EIA/TIA 568A/B Wiring standard
- ▶ EN50173-1
- ▶ ANSI/EIA/TIA 568B.2
- ▶ RoHS

KEYSTONE JACK OPTIONS

