



➤ TELEPHONE PANEL - 50Port

FEATURES

- Support Cat3 16MHz requirement
- Exquisite and compact appearance
- Unique design of balance circuit board and line pair decrease cross talk and increase allowance.
- Sturdy and easy-install design reduces installation and operating costs.
- Unique design of IDC terminating block allows 110 or krone tools.
- Compatible with 19-inch rack and cabinets.
- Numbers for all ports ensure convenient operation.
- With Cable management back rod

TECHNICAL DETAILS

- Current Rating: 1.5A max
- Voltage Rating: 150V
- Contact Resistance: 20MΩ
- Insulation Resistance: 500MΩ
- Dielectric Withstand Voltage: 1000V AC RMS, 60Hz/1min
- Durability:
- 500 times plugging, 250 times terminating
- Module style RJ11 jack socket
- Panel Frame:
- Cold-rolled steel sheet electrostatic spray in black
- 19" Width, 1U Height

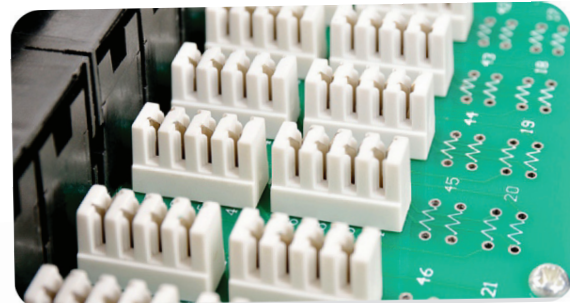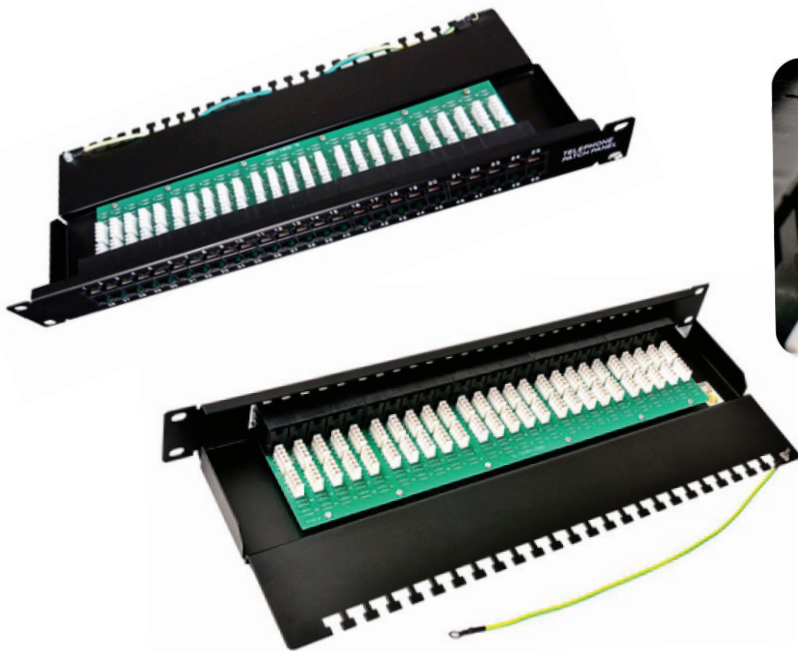

TELEPHONE PATCH PANEL

COMPLIANCES

- ▶ ISO/IEC 11801: 2002
- ▶ EIA/TIA 568A/B Wiring standard
- ▶ EEN50173-1: 2002
- ▶ ANSI/EIA/TIA 568B.2: 2002
- ▶ RoHS

Ordering Information

003-TELP-CA3-050-00L